


- 1° - Mount the product passing the Light Socket wire through the dome hole, put upper dome above dome. and bolt the chase nipple in the bushing to fix it.
- 2° - Pass the cable through the canopy and bushing
- 3° - Bolt the chase nipple in the support



- 4° - Pass the cable through the nipple and adjust the height with the suspension lamp regulator.
- 5° - Make the electrical installation
- 6° - Fix the support in the ceiling
- 7° - Fix the canopy in the bushing bolting it.

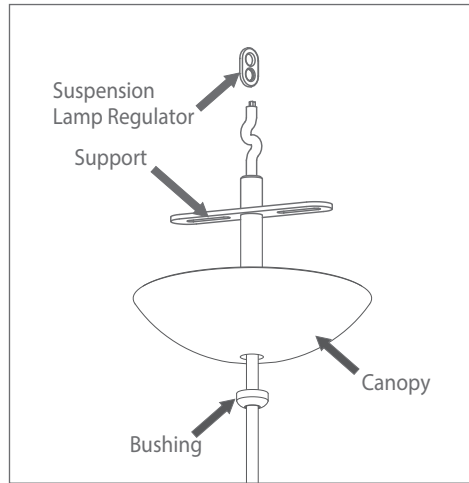

- 8° - Insert the lamp and enjoy it.

ML-2110 Ø15 3/4" x 15 1/3" E26 120/277V **Power Max:12W** **Weight: 3.01 lbs**

Product indicated for indoor areas.

Attention

Follow the instructions to ensure proper and safe operation. We recommend that the installation be done by a qualified professional. Recessed ceiling installation requires rigid support point attachment and special installations require special attachment.

Important

Lamps, transformers, and reactors are not included with the product except as noted. Failure to follow the instructions in the manual could result in accidents and loss of warranty. Do not adjust springs and brackets unless otherwise indicated.
 Warranty: 1 year for product and 5 years for Led and Driver.

Cleaning and Maintenance

Before any action turn off the electric current. Clean only with water dampened flannel, never use chemicals or abrasives. The materials that make up the product are non-toxic.